

H.S. WHITE CORPORATION



SCUPPER LIPS


Short Neck, Long Neck, Water Tri-Extension, Funnel Type and Tri-Scupper Modified Styles.

Available in standard sizes in accordance with NSN or U.S. Navy Mold numbers.

For non-standard sizes, please specify style and dimensions required when ordering.

NSN	Navy Mold	Flange O.D.	Hole I.D.	Type
2040-00-371-8008	3570	6-1/2"	2-1/8"	Short Neck
2040-00-371-8010	3571	8"	3-1/4"	
2040-00-371-8011	3576	8"	3-1/4"	Long Neck
2040-00-371-8012	3572	9"	4-1/4"	Short Neck
2040-00-963-6900	1376-A			Water Tri-Extension
2040-00-371-8013	3577	9"	4-1/4"	Long Neck
2040-00-371-8014	3573	10"	5-1/4"	Short Neck
2040-00-371-8015	3578	10"	5-1/4"	Long Neck
2040-00-371-8016				
2040-00-371-8017	3574	11"	6-1/2"	Short Neck
5975-605-7702-(72)		18" LG	5" to 2-1/4"	Funnel Type
2040-00-371-8009		6-1/2"		Long Neck
Tri-Scupper Modified				Tri-Scupper Modified

RUBBER VIBRATION/SOUND ABSORBERS Styles 3150 and 3250

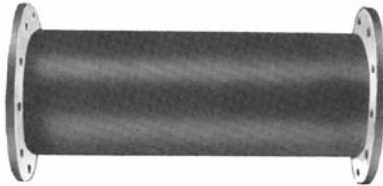

Designed with molded rubber flanged ends with bolt holes that accommodate standard steel flanges. Furnished with or without helical wire reinforcement. Special tubes can be compounded to meet unique service conditions in either suction or discharge applications. (Specify requirements when ordering.)

Percentage of Reduction of Vibration Input with Frequency and Pressure as Compared to Steel Pipe			
Center Frequency Hz	8" I.D. x 24" F-F		
	10 psig	50 psig	80 psig
440	87%	91%	93%
68	95%	96%	99%
125	98%	99%	99%
250	96%	97%	99%
500	91%	93%	94%
1000	82%	91%	96%
2000	99%	99%	99%
4000	99%	99%	99%
8000	97%	97%	98%

FLEXIBLE CONNECTORS

STYLE 3150	150# W.P.	180°F
STYLE 3250	250# W.P.	180°F
STYLE 3150 H.T.	150# W.P.	250°F
STYLE 3250 H.T.	250# W.P.	250°F

Joint Size I.D.	Face to Face		Ring I.D.	Flange		Bolt Circle Diam.	Bolt Holes	
	Min.	Max.		Diam.	Thickness		No.	Diam.
STYLE 3150 (150 psi U.S.A. Drilling)								
1-1/2	12	24	2-7/8	5	11/16	3-7/8	4	5/8
2	12	24	3-5/8	6	11/16	4-3/4	4	3/4
3	12	36	4-5/8	7-1/2	27/32	6	4	3/4
4	12	36	5-7/8	9	27/32	7-1/2	8	3/4
5	12	36	6-7/8	10	15/16	8-1/2	8	7/8
6	18	36	7-7/8	11	31/32	9-1/2	8	7/8
8	24	48	9-7/8	13-1/2	31/32	11-3/4	8	7/8
10	24	48	12-1/4	16	1-3/16	14-1/4	12	1
12	24	48	14-1/2	19	1-7/32	17	12	1
STYLE 3250 (250 psi U.S.A. Drilling)								
1-1/2	12	24	2-7/8	6-1/8	23/32	4-1/2	4	7/8
2	12	24	3-5/8	6-1/2	23/32	5	8	3/4
3	12	36	4-5/8	8-1/4	27/32	6-5/8	8	7/8
4	12	36	5-7/8	10	7/8	7-7/8	8	7/8
5	12	36	6-7/8	11	15/16	9-1/4	8	7/8
6	18	36	7-7/8	12-1/2	15/16	10-5/8	12	7/8
8	24	48	9-7/8	15	1-1/16	13	12	1
10	24	48	12-1/4	17-1/2	1-11/32	15-1/4	16	1-1/8
12	24	48	14-1/2	20-1/2	1-11/32	17-3/4	16	1-1/4

1350 S. Dixie Highway East
Pompano Beach, FL 33060
Phone: (954) 785-6760
Fax: (954) 785-8247



H.S. WHITE
CORPORATION
Marine and Industrial Specialists

Visit us online at
www.hswhite.com
Call (800) 327-8575