




H.S. WHITE
CORPORATION

Marine Hose Solutions

Series 100/250 Marine Hardwall Exhaust Hose

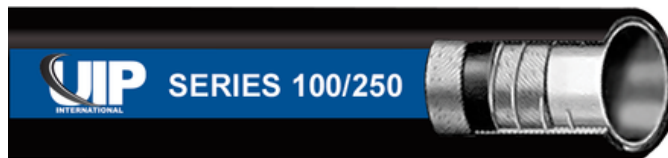

Compounded to resist engine heat, exhaust fumes, ozone, mild acids, toilet effluent, saltwater, and abrasion. Meets or exceeds USCG, ABYC, and SAE J2006 R2 Standards for wet exhaust service.

| | |
|-----------------------|---|
| Tube: | Black EPDM blend |
| Reinforcement: | Multiple textile plies with dual wire helix |
| Cover: | Black EPDM blend |
| Temperature: | -20°F to +200°F |
| Branding: | Blue Mylar / White Letters |

| Part # | I.D. (In) | O.D. (In) | W.P. (PSIG) |
|----------|-----------|-----------|-------------|
| 100-0120 | 1/2 | .83 | 203 |
| 100-0580 | 5/8 | .94 | 169 |
| 100-0340 | 3/4 | 1.06 | 135 |
| 100-0780 | 7/8 | 1.18 | 135 |
| 100-1000 | 1 | 1.35 | 102 |
| 100-1180 | 1-1/8 | 1.50 | 97 |
| 100-1140 | 1-1/4 | 1.61 | 97 |
| 100-1560 | 1-5/16 | 1.65 | 97 |
| 100-1380 | 1-3/8 | 1.73 | 82 |
| 250-1120 | 1-1/2 | 1.93 | 82 |
| 250-1580 | 1-5/8 | 2.05 | 68 |
| 250-1340 | 1-3/4 | 2.20 | 58 |
| 250-1780 | 1-7/8 | 2.32 | 53 |

| Part # | I.D. (In) | O.D. (In) | W.P. (PSIG) |
|----------|-----------|-----------|-------------|
| 250-2000 | 2 | 2.44 | 68 |
| 250-2180 | 2-1/8 | 2.60 | 63 |
| 250-2140 | 2-1/4 | 2.72 | 63 |
| 250-2380 | 2-3/8 | 2.80 | 53 |
| 250-2120 | 2-1/2 | 2.87 | 87 |
| 250-2580 | 2-5/8 | 3.03 | 87 |
| 250-2340 | 2-3/4 | 3.15 | 77 |
| 250-2780 | 2-7/8 | 3.27 | 77 |
| 250-3000 | 3 | 3.46 | 77 |
| 250-3180 | 3-1/8 | 3.58 | 77 |
| 250-3140 | 3-1/4 | 3.74 | 68 |
| 250-3120 | 3-1/2 | 3.98 | 63 |
| 250-4000 | 4 | 4.65 | 58 |